# Fixed Angle Ground Mount / High Wind Fixed Angle Ground Mount

| Available Configurations | | |
|---|---|---|
| Modules | A-Frames | |
| | High Wind | Standard |
| 6 | 2 | |
| 8 | 2 | |
| 10 | 2 | |
| 12 | 3 | |
| 14 | 3 | |
| 16 | 3 | 3 |
| 18 | 4 | 3 |
| 20 | 4 | 3 |
| 22 | 4 | |
| 24 | 5 | 4 |
| 26 | 5 | 4 |
| 28 | 5 | 4 |
| 30 | 6 | |
| 32 | 6 | 5 |
| 34 | 6 | 5 |
| 36 | 7 | 5 |
| 38 | 7 | |
| 40 | 7 | 6 |
| 42 | 8 | 6 |
| 44 | 8 | 6 |
| 46 | 8 | |
| 48 | 9 | 7 |
| 50 | 9 | 7 |
| 52 | 9 | 7 |

- For use with both 60 and 72 cell modules
- Fixed Angle 45°
- All steel construction with no holes to be drilled or pieces to be cut
- Both versions support a snow load up to 2.5 kPa (Ground Snow Load) / 1.04 kPa (ULS)
- High Wind Fixed Angle Ground Mount supports Wind load up to 1.0 kPa (hourly base wind pressure)
- Fixed Angle Ground Mount supports Wind load up to 0.5 kPa (hourly base wind pressure)
- Accommodates modules up to 2.024m long
- Fixed Angle Ground Mount has reduced cost and installation time thanks to fewer components

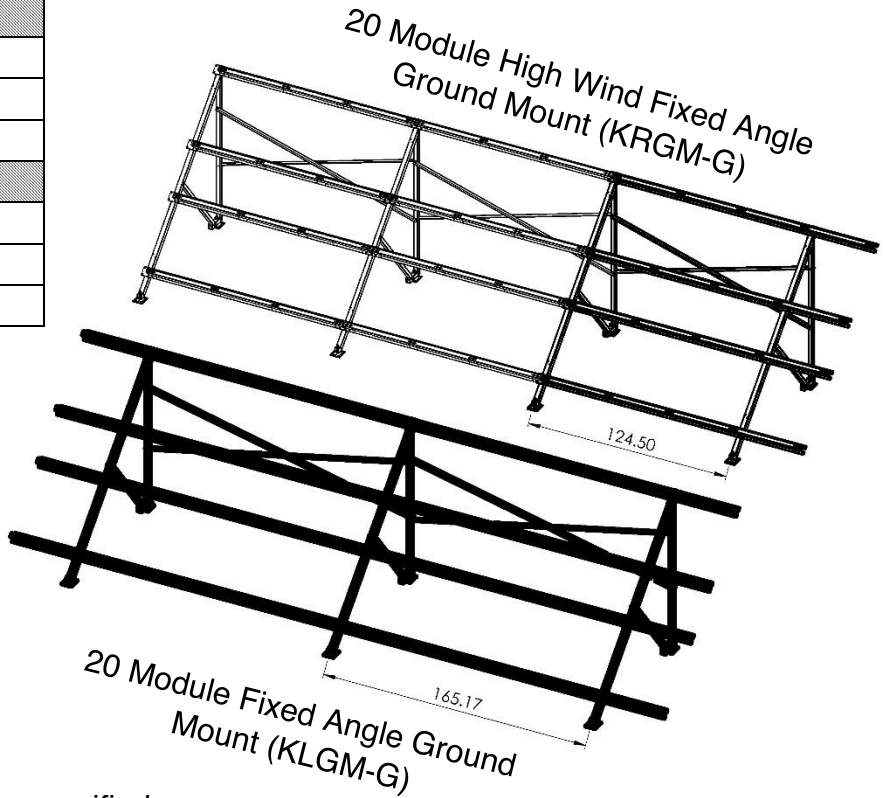


*Foundation not included
** Ballast size is site specific
*** All sizes in inches unless otherwise specified